


## PS-12750 12 Volt 75.0 AH Rechargeable Sealed Lead Acid Battery




### Terminals (mm)

- U: Universal terminals: Heavy-duty posts with 'nut & bolt' fasteners



### Physical Dimensions: in (mm)

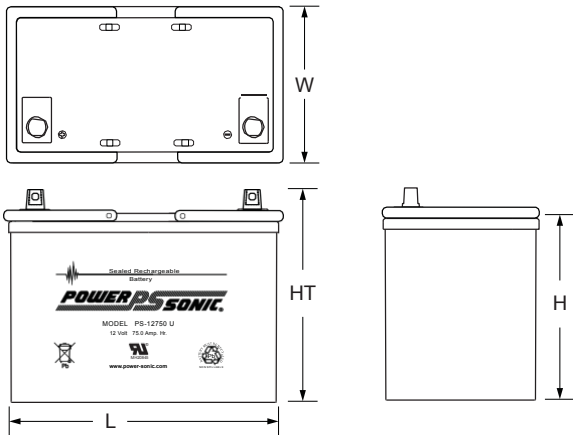

L: 10.25 (260) W: 6.60 (168) H: 8.15 (207) HT: 8.98(228)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

### Features

- Absorbent Glass Mat (AGM) technology for superior performance
- Valve regulated, spill proof construction allows safe operation in any position
- Power/volume ratio yielding unrivaled energy density
- Rugged impact resistant ABS case and cover (UL94-HB)
- Integrated ABS carrying handles for ease of movement
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L. recognized under file number MH 20845

### Performance Specifications

**Nominal Voltage** ..... 12 volts (6 cells)

#### Nominal Capacity

20-hr. (3.75A to 10.50 volts) .....	75.0 AH
10-hr. (7.2A to 10.50 volts) .....	72.0 AH
5-hr. (13.6A to 10.20 volts) .....	68.0 AH
1-hr. (47A to 9.00 volts) .....	47.0 AH
15-min. (160A to 9.00 volts) .....	40.0 AH

**Approximate Weight** ..... 50.60 lbs. (22.95 kg)

**Energy Density** (20-hr. rate) ..... 1.63 W-h/in<sup>3</sup> (99.61 W-h/l)

**Specific Energy** (20-hr. rate) ..... 17.79 W-h/lb (39.21 W-h/kg)

**Internal Resistance** (approx.) ..... 6 milliohms

**Max Discharge Current** (7 Min.) ..... 225.0 amperes

**Max Short-Duration Discharge Current** (10 Sec.)..... 560.0 amperes

#### Shelf Life (% of nominal capacity at 68 °F (20 °C))

1 Month .....	97%
3 Months.....	91%
6 Months .....	83%

#### Operating Temperature Range

Charge.. .....	-4 °F (-20 °C) to 122 °F (50 °C)
Discharge.....	-40 °F (-40 °C) to 140 °F (60 °C)


**Case** ..... ABS Plastic

**Power-Sonic Chargers**.....PSC-1210000A-C


**Constant Power Discharge Ratings**

MODEL	FINAL VOLTAGE	WATTS PER CELL @ 25° C						
		5 MIN	10 MIN	15 MIN	20 MIN	30 MIN	45 MIN	60 MIN
<b>PS-12750</b>	1.75	480	339	270	220	168	126	102
	1.70	509	356	278	231	171	128	103
	1.67	518	360	282	233	173	130	106

**Discharge Time vs. Discharge Current**

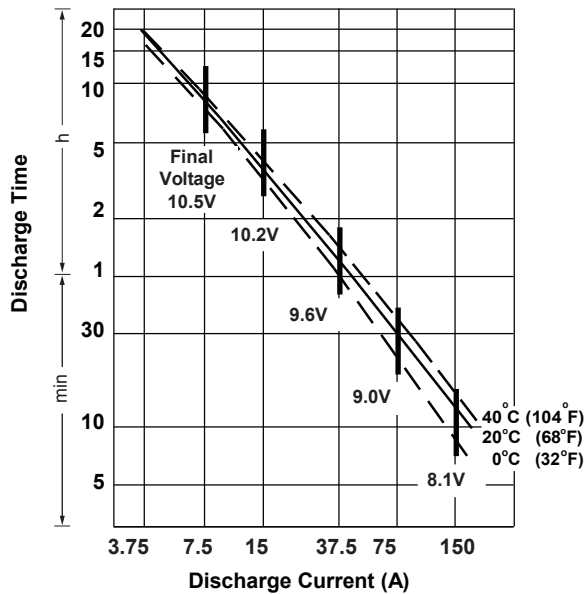

**Discharge Characteristics**

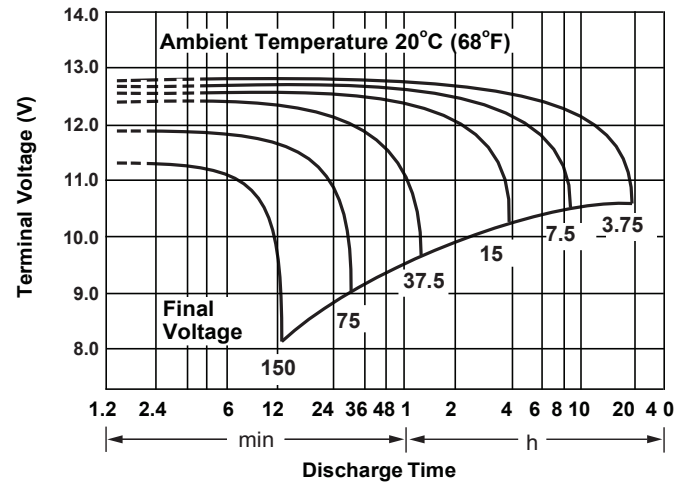

**Charging**

**Cycle Applications:** Limit initial current to 22.5A. Charge until battery voltage (under charge) reaches 14.4 to 14.7 volts at 68°F (20°C). Hold at 14.4 to 14.7 volts until current drops to under 750mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to “float” voltage.


**“Float” or “Stand-By” Service:** Hold battery across constant voltage source of 13.5 to 13.8 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

**Note:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

**Chargers**

Power-Sonic offers a wide range of chargers suitable for batteries up to 100AH. Please refer to the Charger Selection Guide in our specification sheets for “C-Series Switch Mode Chargers” and “Transformer Type A and F Series”. Please contact our Technical department for advice if you have difficulty in locating suitable models.

**Shelf Life & Storage**

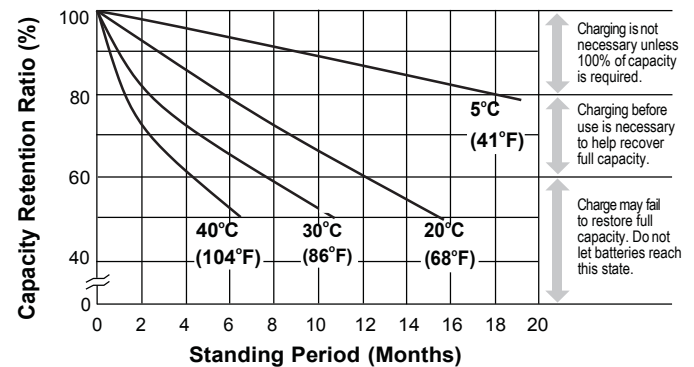

**Further Information**

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc..

